WHITEHOUSE
FLEXIBLE TUBING LTD

# EOLO PVC AF

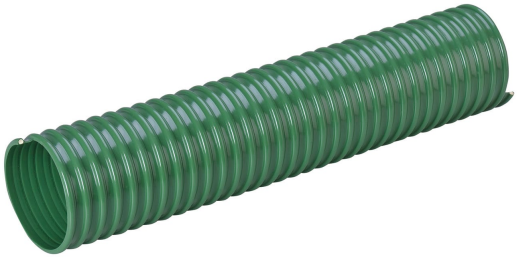

## EOLO PVC AF – FLEXIBLE HOSE AND DUCTING

Green flame retardant plasticized PVC hose reinforced by an anti-shock rigid PVC spiral. Inside perfectly smooth, outside corrugated. Very light and flexible. The material is flame retardant according to UL 94 V0. Antistatic version with copper wire available on request.

- Temp Range: -10 to +50°C
- Size Range: 25 - 300mm
- Material: Plasticized PVC
- Reinforced: PVC spiral

Eolo PVC AF Datasheet

WHITEHOUSE
FLEXIBLE TUBING LTD

## PRODUCT DETAILS

## Eolo PVC AF

Green flame retardant plasticized PVC hose reinforced by an anti-shock rigid PVC spiral. Inside perfectly smooth, outside corrugated. Very light and flexible. The material is flame retardant according to UL 94 V0. Antistatic version with copper wire available on request.

Application Fields: Suction of air, fumes and gas; industrial ventilation systems and air conditioning plants; shipbuilding.

Temp Range: -10 to +50°C

Size Range: 25 – 300mm

Material: Plasticized PVC

Reinforced: PVC spiral

- Temp Range: -10 to +50°C
- Size Range: 25 – 300mm
- Material: Plasticized PVC
- Reinforced: PVC spiral

## TECHNICAL DATA

| CODE | Ø INT. | MIN WALL TH. | MAX WALL TH. | WEIGHT | VACUUM | BENDING | COIL LGTH. | VOLUME |
|---|---|---|---|---|---|---|---|---|
| | mm | mm | mm | g/m | m H2O | mm | m | m3 |
| **EF750200000000*** | 20 | 0,8 | 2,7 | **140** | 2 | 32 | 50 | 0,054 |
| **EF750250000000*** | 25 | 0,8 | 2,7 | **170** | 2 | 32 | 50 | 0,073 |
| **EF750270000000*** | 27 | 0,8 | 2,7 | **180** | 2 | 33 | 50 | 0,077 |
| **EF750320000000*** | 31,8 | 0,8 | 2,7 | **220** | 2 | 35 | 50 | 0,121 |
| **EF750380000000*** | 38,1 | 0,8 | 3 | **270** | 2 | 45 | 50 | 0,141 |
| **EF750400000000*** | 40 | 0,8 | 3,1 | **300** | 2 | 50 | 50 | 0,177 |
| **EF750450000000*** | 45 | 0,8 | 3,4 | **380** | 2 | 55 | 50 | 0,199 |
| **EF750500000000*** | 50 | 0,9 | 3,7 | **460** | 2 | 60 | 50 | 0,248 |
| **EF750520000000** | 50,8 | 0,9 | 3,7 | **470** | 2 | 60 | 50 | 0,251 |
| **EF750550000000*** | 55 | 0,9 | 3,7 | **500** | 2 | 65 | 50 | 0,270 |
| **EF750600000000*** | 60 | 0,9 | 3,7 | **550** | 1,6 | 70 | 50 | 0,388 |
| **EF750630000000*** | 63,5 | 0,9 | 3,7 | **580** | 1,6 | 70 | 50 | 0,408 |
| **EF750700000000*** | 70 | 1 | 3,9 | **630** | 1,5 | 90 | 50 | 0,448 |
| **EF750760000000*** | 76,2 | 1 | 3,9 | **690** | 1,5 | 100 | 50 | 0,605 |
| **EF750800000000** | 80 | 1 | 4,5 | **820** | 1,5 | 110 | 50 | 0,641 |
| **EF750900000000*** | 90 | 1 | 4,5 | **920** | 1,5 | 130 | 30 | 0,428 |
| **EF751000000000** | 100 | 1 | 4,9 | **1060** | 1,3 | 140 | 30 | 0,632 |
| **EF751020000000*** | 102 | 1 | 4,9 | **1080** | 1,3 | 145 | 30 | 0,644 |
| **EF751100000000*** | 110 | 1 | 5,1 | **1200** | 1,2 | 150 | 30 | 0,692 |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| **EF751200000000*** | 120 | 1 | 5,1 | **1300** | 1 | 160 | 30 | 0,750 |
| **EF751270000000*** | 127 | 1 | 5,1 | **1380** | 0,9 | 170 | 30 | 0,790 |
| **EF751300000000*** | 130 | 1 | 5,1 | **1410** | 0,9 | 170 | 30 | 1,077 |
| **EF751400000000*** | 140 | 1 | 5,3 | **1590** | 0,9 | 175 | 30 | 1,157 |
| **EF751500000000** | 151,5 | 1,1 | 5,5 | **1760** | 0,9 | 180 | 20 | 0,832 |
| **EF751520000000*** | 152,4 | 1,1 | 5,5 | **1770** | 0,9 | 180 | 20 | 0,837 |
| **EF751600000000*** | 160 | 1,5 | 6,8 | **2380** | 0,9 | 200 | 20 | 0,889 |
| **EF751800000000*** | 180 | 1,5 | 6,9 | **2720** | 0,9 | 220 | 20 | 1,550 |
| **EF752000000000** | 200 | 1,5 | 7,4 | **3120** | 0,9 | 240 | 20 | 1,718 |
| **EF752030000000*** | 203,2 | 1,5 | 7,4 | **3170** | 0,9 | 250 | 20 | 1,744 |
| **EF752500000000*** | 250 | 1,5 | 7,4 | **3880** | 0,9 | 280 | 10 | 1,356 |
| **EF752540000000*** | 254 | 1,5 | 7,4 | **3950** | 0,9 | 290 | 10 | 1,376 |
| **EF753000000000*** | 300 | 1,5 | 7,6 | **4800** | 0,9 | 330 | 10 | 1,614 |

## DOWNLOADS

Eolo PVC AF

## FAQS

### What is Eolo PVC AF?

Green flame retardant plasticized PVC hose reinforced by an anti-shock rigid PVC spiral. Inside perfectly smooth, outside corrugated. Very light and flexible. The material is flame retardant according to UL 94 V0. Antistatic version with copper wire available on request.

### What applications are listed for Eolo PVC AF?

Application Fields: Suction of air, fumes and gas; industrial ventilation systems and air conditioning plants; shipbuilding.