
WHITEHOUSE
FLEXIBLE TUBING LTD

EOLO PVC AF

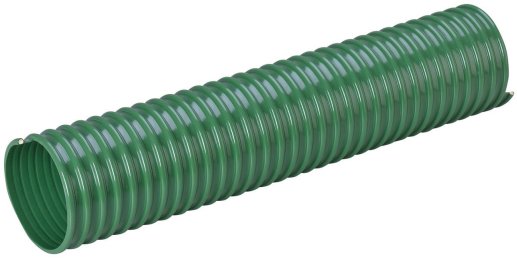

EOLO PVC AF – FLEXIBLE HOSE AND DUCTING

Green flame retardant plasticized PVC hose reinforced by an anti-shock rigid PVC spiral. Inside perfectly smooth, outside corrugated. Very light and flexible. The material is flame retardant according to UL 94 V0. Antistatic version with copper wire available on request.

- Temp Range: -10 to +50°C
- Size Range: 25 - 300mm
- Material: Plasticized PVC
- Reinforced: PVC spiral

Eolo PVC AF Datasheet

WHITEHOUSE
FLEXIBLE TUBING LTD

PRODUCT DETAILS

Eolo PVC AF

Green flame retardant plasticized PVC hose reinforced by an anti-shock rigid PVC spiral. Inside perfectly smooth, outside corrugated. Very light and flexible. The material is flame retardant according to UL 94 V0. Antistatic version with copper wire available on request.

Application Fields: Suction of air, fumes and gas; industrial ventilation systems and air conditioning plants; shipbuilding.

Temp Range: -10 to +50°C

Size Range: 25 – 300mm

Material: Plasticized PVC

Reinforced: PVC spiral

- Temp Range: -10 to +50°C
- Size Range: 25 – 300mm
- Material: Plasticized PVC
- Reinforced: PVC spiral

TECHNICAL DATA

CODE	Ø INT.	MIN WALL TH.	MAX WALL TH.	WEIGHT	VACUUM	BENDING	COIL LGTH.	VOLUME
	mm	mm	mm	g/m	m H2O	mm	m	m3
EF750200000000*	20	0,8	2,7	**140**	2	32	50	0,054
EF750250000000*	25	0,8	2,7	**170**	2	32	50	0,073
EF750270000000*	27	0,8	2,7	**180**	2	33	50	0,077
EF750320000000*	31,8	0,8	2,7	**220**	2	35	50	0,121
EF750380000000*	38,1	0,8	3	**270**	2	45	50	0,141
EF750400000000*	40	0,8	3,1	**300**	2	50	50	0,177
EF750450000000*	45	0,8	3,4	**380**	2	55	50	0,199
EF750500000000*	50	0,9	3,7	**460**	2	60	50	0,248
EF750520000000	50,8	0,9	3,7	**470**	2	60	50	0,251
EF750550000000*	55	0,9	3,7	**500**	2	65	50	0,270
EF750600000000*	60	0,9	3,7	**550**	1,6	70	50	0,388
EF750630000000*	63,5	0,9	3,7	**580**	1,6	70	50	0,408
EF750700000000*	70	1	3,9	**630**	1,5	90	50	0,448
EF750760000000*	76,2	1	3,9	**690**	1,5	100	50	0,605
EF750800000000	80	1	4,5	**820**	1,5	110	50	0,641
EF750900000000*	90	1	4,5	**920**	1,5	130	30	0,428
EF751000000000	100	1	4,9	**1060**	1,3	140	30	0,632
EF751020000000*	102	1	4,9	**1080**	1,3	145	30	0,644
EF751100000000*	110	1	5,1	**1200**	1,2	150	30	0,692

EF751200000000*	120	1	5,1	**1300**	1	160	30	0,750
EF751270000000*	127	1	5,1	**1380**	0,9	170	30	0,790
EF751300000000*	130	1	5,1	**1410**	0,9	170	30	1,077
EF751400000000*	140	1	5,3	**1590**	0,9	175	30	1,157
EF751500000000	151,5	1,1	5,5	**1760**	0,9	180	20	0,832
EF751520000000*	152,4	1,1	5,5	**1770**	0,9	180	20	0,837
EF751600000000*	160	1,5	6,8	**2380**	0,9	200	20	0,889
EF751800000000*	180	1,5	6,9	**2720**	0,9	220	20	1,550
EF752000000000	200	1,5	7,4	**3120**	0,9	240	20	1,718
EF752030000000*	203,2	1,5	7,4	**3170**	0,9	250	20	1,744
EF752500000000*	250	1,5	7,4	**3880**	0,9	280	10	1,356
EF752540000000*	254	1,5	7,4	**3950**	0,9	290	10	1,376
EF753000000000*	300	1,5	7,6	**4800**	0,9	330	10	1,614

DOWNLOADS

Eolo PVC AF

FAQS

What is Eolo PVC AF?

Green flame retardant plasticized PVC hose reinforced by an anti-shock rigid PVC spiral. Inside perfectly smooth, outside corrugated. Very light and flexible. The material is flame retardant according to UL 94 V0. Antistatic version with copper wire available on request.

What applications are listed for Eolo PVC AF?

Application Fields: Suction of air, fumes and gas; industrial ventilation systems and air conditioning plants; shipbuilding.