
WHITEHOUSE
FLEXIBLE TUBING LTD

EOLO SE

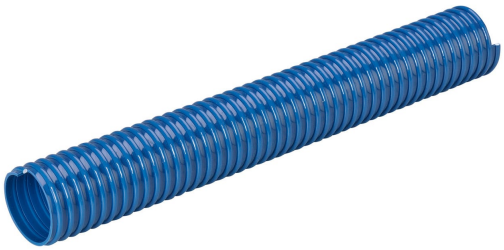

EOLO SE – FLEXIBLE HOSE AND DUCTING

Light blue plasticized PVC duct reinforced with rigid anti-shock PVC spiral. Inside smooth, outside corrugated. Flexible particularly at low temperatures, high mechanical resistance. It resists to atmospherical agents and to most chemicals. On request it can be manufactured in the antistatic version with copper wire.

- Temp Range: -25 to +50°C
- Size Range: 16 - 250mm
- Material: Plasticized PVC
- Reinforced: PVC spiral

Eolo SE Datasheet

WHITEHOUSE
FLEXIBLE TUBING LTD

PRODUCT DETAILS

Eolo SE

Light blue plasticized PVC duct reinforced with rigid anti-shock PVC spiral. Inside smooth, outside corrugated. Flexible particularly at low temperatures, high mechanical resistance. It resists to atmospherical agents and to most chemicals. On request it can be manufactured in the antistatic version with copper wire.

Application Fields: For industrial and domestic vacuum cleaners, aerating and conditioning plants, suction of fumes and gases.

Temp Range: -25 to +50°C

Size Range: 16 – 250mm

Material: Plasticized PVC

Reinforced: PVC spiral

- Temp Range: -25 to +50°C
- Size Range: 16 – 250mm
- Material: Plasticized PVC
- Reinforced: PVC spiral

TECHNICAL DATA

CODE	Ø INT.	MIN WALL TH.	MAX WALL TH.	WEIGHT	VACUUM	BENDING	COIL LGTH.	VOL.
	mm/inch	mm	mm	g/m	m H2O	mm	m	m3
EE010160000000*	16	1,2	2,6	**130**	6	65	50	0,037
EE010190000000*	19,1	1,2	2,6	**150**	6	65	50	0,049
EE010200000000*	20	1,2	2,6	**150**	6	80	50	0,051
EE010250000000*	25	1,2	2,6	**190**	6	100	50	0,072
EE010300000000*	30	1,4	3	**270**	6	110	50	0,115
EE010320000000*	31,8	1,4	3,1	**300**	6	120	50	0,122
EE010350000000*	35	1,5	3,2	**330**	5	130	50	0,132
EE010380000000*	38,1	1,5	3,2	**360**	5	135	50	0,142
EE010390000000*	39	1,5	3,2	**370**	5	140	50	0,145
EE010400000000*	40	1,5	3,2	**380**	5	160	50	0,178
EE010450000000*	45	1,6	3,4	**460**	5	175	50	0,199
EE010500000000*	50	1,6	3,9	**570**	5	175	50	0,250
EE010515000000*	51,5	1,6	3,9	**580**	5	180	50	0,256
EE010520000000*	50,8	1,6	3,9	**580**	5	175	50	0,253
EE010550000000*	55	1,7	4	**650**	5	190	50	0,272
EE010570000000*	57	1,7	4	**680**	5	200	50	0,374
EE010600000000*	60	2	4,6	**880**	5	220	50	0,399
EE010630000000*	63,5	2	4,6	**930**	5	230	50	0,419
EE010650000000*	65	2	4,6	**950**	5	250	50	0,427

EE010700000000*	70	2	5,2	**1070**	5	270	50	0,463
EE010760000000*	76,2	2	5,2	**1160**	5	290	50	0,624
EE010800000000*	80	2	5,4	**1220**	5	350	30	0,523
EE010900000000*	90	2	5,4	**1360**	4,5	400	30	0,581
EE011000000000*	100	2,1	5,6	**1520**	4,5	400	30	0,641
EE011020000000*	102	2,1	5,6	**1550**	4,5	430	30	0,652
EE011100000000*	110	2,1	6,2	**1810**	4,5	470	30	0,705
EE011200000000*	120	2,1	6,3	**2000**	4,5	500	30	1,018
EE011270000000*	127	2,2	6,5	**2220**	4,5	510	30	1,075
EE011300000000*	130	2,3	6,8	**2430**	4	560	30	1,103
EE011400000000*	140	2,3	7	**2700**	4	600	20	1,183
EE011500000000*	151,5	2,5	7,3	**3010**	4	600	20	1,276
EE011520000000*	152,4	2,5	7,4	**3080**	4	650	20	1,284
EE011600000000*	160	2,7	8	**3320**	3,5	730	20	1,408
EE011800000000*	180	2,7	8	**3720**	3,5	800	20	1,568
EE012000000000*	200	2,7	8	**3960**	3,5	800	20	1,728
EE012030000000*	203,2	2,7	8	**4020**	3	1250	10	1,754
EE012500000000*	250	2,8	8,4	**5260**	7	1500	10	2,134

DOWNLOADS

Eolo SE

FAQS

What is Eolo SE?

Light blue plasticized PVC duct reinforced with rigid anti-shock PVC spiral. Inside smooth, outside corrugated. Flexible particularly at low temperatures, high mechanical resistance. It resists to atmospherical agents and to most chemicals. On request it can be manufactured in the antistatic version with copper wire.

What applications are listed for Eolo SE?

Application Fields: For industrial and domestic vacuum cleaners, aerating and conditioning plants, suction of fumes and gases.