




WHITEHOUSE
FLEXIBLE TUBING LTD

VULCANO® 09 ET

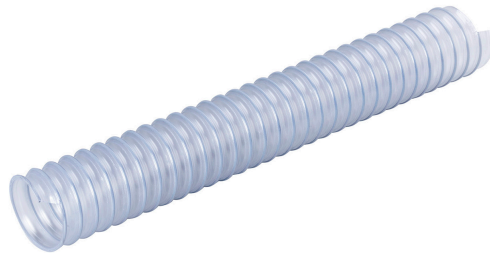

TPU hose reinforced with gray colored TPU coated high adhesion steel spiral. The wall material is permanent antistatic ($R < 109 \text{ Ohm/m}$). Smooth inside to ensure optimization of flow properties. Constant wall thickness of 0,9 mm for the whole diameter range. Resistant to microbes and to hydrolysis. Suitable to deliver foodstuff, according to EU 10/2011(classes A, B, C, D1, D2, E) and FDA Reg. (title 21 CFR 177.2600, classes D, F, E). The hose is odourless and doesn't change the organoleptical properties of the transferred materials, It can be made conductive ($R < 102 \text{ Ohm/m}$) by grounding the spiral.

Application Fields: Suction of abrasive powders and substances in food processing and pharma plants and anywhere resistance to microbes and hydrolysis is required.

- **Temp Range:** -40 to +90°C
- **Size Range:** 20 - 500mm
- **Material:** Ether based TPU
- **Reinforced:** Steel spiral with grey TPU

[Vulcano 09 ET Datasheet](#)

[Vulcano 09 ET Food Declaration](#)



WHITEHOUSE
FLEXIBLE TUBING LTD