


VULCANO® 15 ET

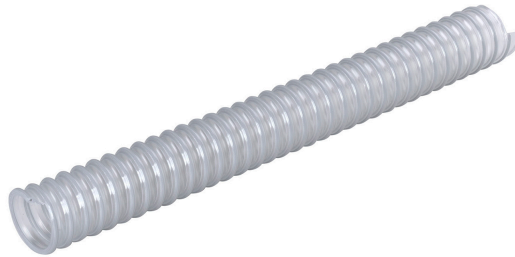

Translucent ether based TPU hose reinforced with TPU coated grey coloured steel spiral. Constant wall thickness of 1,5m. The wall material is permanent antistatic.

Application Fields: Suction of highly abrasive powders and substances in food processing and pharma plants and where resistance to microbes and hydrolysis is required. It can be made conductive by grounding the spiral.

- **Temp Range:** -40 to +90°C
- **Size Range:** 20 - 500mm
- **Material:** Ether based TPU
- **Reinforced:** Steel spiral with grey TPU

[Vulcano 15 ET Datasheet](#)

[Vulcano 15 ET Food Declaration](#)



WHITEHOUSE
FLEXIBLE TUBING LTD

TECHNICAL DATA

CODE	Ø INT.	MIN WALL TH.	WEIGHT	VACUUM	BENDING	COIL LGTH.	VOL.	DOUBLE BRIGE W2
	mm	mm	g/m	m H2O	mm	m	m3	
VI010200000000*	20	1,5	250	9,5	25	20	0,041	-
VI010250000000*	25	1,5	300	9,5	30	20	0,048	-
VI010300000000*	30	1,5	390	9,5	35	20	0,055	-
VI010320000000*	32	1,5	415	9,5	35	20	0,058	-
VI010350000000*	35	1,5	450	9,5	40	20	0,062	-
VI010380000000	38	1,5	470	9,5	40	20	0,091	-
VI010400000000	40	1,5	490	9,5	50	20	0,095	-
VI010450000000*	45	1,5	545	9	50	20	0,104	-
VI010500000000	50	1,5	600	9	60	20	0,114	-
VI010510000000	51	1,5	610	9	60	20	0,116	-
VI010600000000	60	1,5	705	8,5	70	20	0,133	-
VI010630000000	63	1,5	740	8	70	20	0,185	-
VI010650000000*	65	1,5	760	7,5	70	20	0,190	-
VI010700000000	70	1,5	895	7,5	80	20	0,205	-
VI010750000000*	75	1,5	955	7	80	20	0,218	-
VI010760000000	76	1,5	965	7	90	20	0,220	-
VI010800000000	80	1,5	1015	6	90	20	0,259	F2 W2 076.0
VI010900000000	90	1,5	1135	5	100	20	0,288	090.0
VI011000000000*	100	1,5	1250	4	120	15	0,317	
VI011020000000	102	1,5	1275	3,5	120	15	0,323	
VI011100000000	110	1,5	1370	3,2	130	15	0,346	
VI011150000000	115	1,5	1430	3	135	15	0,360	
VI011200000000	120	1,5	1490	3	140	15	0,374	F2 W2 100.0
VI011270000000	127	1,5	1875	2,9	150	15	0,397	127.0
VI011300000000*	130	1,5	1920	2,6	150	15	0,406	
VI011400000000*	140	1,5	2060	2,4	160	15	0,651	
VI011500000000	150	1,5	2200	2	170	15	0,695	
VI011520000000	152	1,5	2230	2	170	15	0,703	
VI011600000000	160	1,5	2345	1,8	180	15	0,738	F2 W2 130.0
VI011700000000	170	1,5	2435	1,5	210	15	0,784	190.0
VI011800000000	180	1,5	2570	1,5	210	15	0,827	
VI012000000000	200	1,5	2850	1,2	230	15	0,913	
VI012030000000	203	1,5	2890	1,2	230	15	0,926	
VI012060000000*	206	1,5	2930	1,2	235	15	1,113	
VI012200000000*	220	1,5	3125	1	260	10	1,185	F2 W2 200.0
VI012280000000*	228	1,5	3235	1	260	10	1,226	230.0



WHITEHOUSE

FLEXIBLE TUBING LTD

VI012500000000*	250	1,5	3540	0,8	290	10	1,338	
VI012540000000*	254	1,5	3595	0,8	290	10	1,359	
VI012570000000*	257	1,5	3635	0,7	295	10	1,374	
VI012650000000*	265	1,5	3745	0,7	300	10	1,415	
VI012790000000*	279	1,5	3940	0,7	320	10	1,487	F2 W2 250.0
VI013050000000*	305	1,5	5145	0,5	350	10 m pz. dritti/ straight	1,007	330.0
VI013560000000*	356	1,5	5990	0,3	420	6 m pz. dritti/ straight	0,814	F2 W2 350.0
VI014000000000*	400	1,5	6715	0,3	480	6 m pz. dritti/ straight	1,020	410.0
VI014500000000*	450	1,5	7540	0,25	540	6 m pz. dritti/ straight	1,283	-
VI015000000000*	500	1,5	8370	0,2	600	6 m pz. dritti/ straight	1,575	-

DOWNLOADS

[Vulcano 15 ET Datasheet](#)

[Vulcano 15 ET Food Declaration](#)

Vulcano 15 ET Datasheet and Food Declaration