




WHITEHOUSE
FLEXIBLE TUBING LTD

VULCANO® STONE PLUS

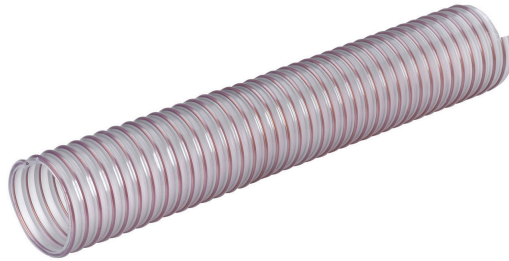

Translucent antimicrobial ester based TPU hose, reinforced with TPU coated copper coloured steel spiral, to ensure the best adhesion with the hose wall. Smooth inside, it has a constant wall thickness of 2,5 mm, which enhances a better resistance to abrasion and a longer life. It maintains very high flexibility though its thickness and easy handling, due to its light weight. Resistant to extreme abrasion, mineral oils, ageing, ozone and atmospheric agents. It can be made conductive ($R < 10 \Omega / \text{metre}$) by grounding the spiral.

Application Fields: Suction of extremely abrasive media, like quartz sand, waste material in steelworks and particularly indicated for vacuum cleaner trucks. As well as Urano HD Super, it represents the best solution in terms of abrasion resistance in the roof rocking sector. Vulcano® Stone Plus can be also installed in cement factories and quarries.

- **Temp Range:** -40 to +90°C
- **Size Range:** 40 - 250mm
- **Material:** Ester based TPU
- **Reinforced:** Steel spiral covered in TPU with high copper adhesion

[Vulcano Stone Plus Datasheet](#)



WHITEHOUSE
FLEXIBLE TUBING LTD

TECHNICAL DATA

CODE	Ø INT.	MIN WALL TH.	WEIGHT	VACUUM	BENDING	COIL LGTH.	VOL.
	mm/inch	mm	g/m	m H2O	mm	m	m3
TH070400000000*	40	2,5	945	9,7	180	15	0,10
TH070450000000*	45	2,5	1210	9,7	200	15	0,11
TH070510000000*	51	2,5	1350	9,7	200	15	0,12
TH070600000000*	60	2,5	1560	9,7	250	15	0,19
TH070800000000*	80	2,5	2025	9,7	300	10 m pz. dritti/ straight	0,38
TH070900000000*	90	2,5	2255	9,7	350	10 m pz. dritti/ straight	0,42
TH071000000000*	100	2,5	2660	9,5	500	10 m pz. dritti/ straight	0,46
TH071020000000*	102	2,5	2710	9,5	500	10 m pz. dritti/ straight	0,47
TH071270000000*	127	2,5	3710	9	600	10 m pz. dritti/ straight	0,20
TH071520000000*	152	2,5	4235	8	800	6 m pz. dritti/ straight	0,17
TH071750000000*	175	2,5	5370	6	900	6 m pz. dritti/ straight	0,22
TH072000000000*	200	2,5	6110	4	1000	6 m pz. dritti/ straight	0,28
TH072030000000*	203	2,5	6195	4	1000	6 m pz. dritti/ straight	0,28
TH072250000000*	225	2,5	6855	4	1200	6 m pz. dritti/ straight	0,35
TH072500000000*	250	2,5	7595	4	1400	6 m pz. dritti/ straight	0,42
TH072540000000*	254	2,5	7710	4	1400	6 m pz. dritti/ straight	0,44

DOWNLOADS

[Vulcano Stone Plus Delivery and Suction Hose](#)