


VULCANO® STONE

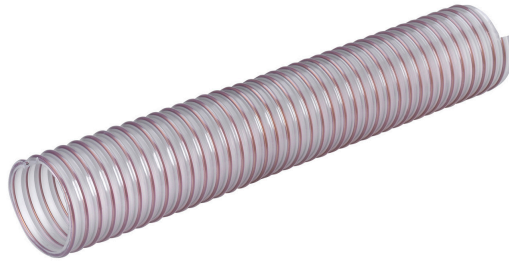

Translucent antimicrobial ester based TPU hose, reinforced with TPU coated copper coloured steel spiral, to ensure the best adhesion with the hose wall. Smooth inside. It maintains very high flexibility through its thickness and easy handling, due to its light weight. Resistant to extreme abrasion, mineral oils, ageing, ozone and atmospheric agents. It can be made conductive ($R < 02 \text{ Ohm/metre}$) by grounding the spiral. Specially developed to withstand the hardest applications like vacuum cleaner trucks and roof rocking.

Application Fields: Suction of extremely abrasive media. Particularly indicated for vacuum cleaner trucks and in the roof rocking sector. It can be also used in steelworks, cement factories and in quarries.

- **Temp Range:** -40 to +90°C
- **Size Range:** 38 - 250mm
- **Material:** Ester based TPU
- **Reinforced:** Steel spiral with copper colour TPU

[Vulcano Stone Datasheet](#)



WHITEHOUSE
FLEXIBLE TUBING LTD

TECHNICAL DATA

CODE	Ø INT.	MIN WALL TH.	WEIGHT	VACUUM	BENDING	COIL LGTH.	VOL.
	mm/inch	mm	g/m	m H ₂ O	mm	m	m ³
TH010380000000*	38	2	800	9,7	150	15	0,06
TH010400000000*	40	2	840	9,7	160	15	0,07
TH010450000000*	45	2	930	9,7	180	15	0,11
TH010510000000*	51	2	1140	9,7	204	15	0,12
TH010600000000*	60	2	1320	9,7	240	15	0,18
TH010630000000*	63	2	1380	9,7	250	15	0,19
TH010650000000*	65	2	1420	9,7	250	15	0,20
TH010700000000*	70	2	1520	9,5	280	15	0,21
TH010760000000*	76	2	1640	9,5	305	15	0,25
TH010800000000*	80	2	1720	9,5	320	15	0,26
TH010900000000*	90	2	1925	9,5	360	15	0,29
TH011000000000*	100	2	2275	9,5	400	10	0,32
TH011020000000*	102	2	2320	9,5	410	10	0,33
TH011100000000*	110	2	2490	9,4	440	10	0,35
TH011150000000*	115	2	2600	9,4	460	10	0,37
TH011200000000*	120	2	2705	9,2	480	10	0,68
TH011270000000*	127	2	2965	9	510	10 m pz. dritti/ straight	0,72
TH011300000000*	130	2	3030	9	520	10 m pz. dritti/ straight	0,73
TH011400000000*	140	2	3255	8,7	560	10 m pz. dritti/ straight	0,23
TH011500000000*	150	2	3475	8,5	600	10 m pz. dritti/ straight	0,27
TH011520000000*	152	2	3520	8,2	610	10 m pz. dritti/ straight	0,27
TH011600000000*	160	2	4245	8	640	10 m pz. dritti/ straight	0,30
TH011800000000*	180	2	4750	7	810	10 m pz. dritti/ straight	0,37
TH012000000000*	200	2	5260	6	1000	10 m pz. dritti/ straight	1,64
TH012030000000*	203	2	5335	6	1015	10 m pz. dritti/ straight	0,47
TH012280000000*	228	2	5975	5	-	6 m pz. dritti/ straight	0,35



WHITEHOUSE
FLEXIBLE TUBING LTD

TH012400000000*	240	2	6280	4	-	6 m pz. dritti/ straight	0,39
TH012450000000*	245	2	6405	4	-	6 m pz. dritti/ straight	0,40
TH012500000000*	250	2	6535	4	-	6 m pz. dritti/ straight	0,42
TH012540000000*	254	2	6635	4	-	6 m pz. dritti/ straight	0,43

DOWNLOADS

[Vulcano Stone Suction Hose](#)