
WHITEHOUSE
FLEXIBLE TUBING LTD

PLUTONE PK

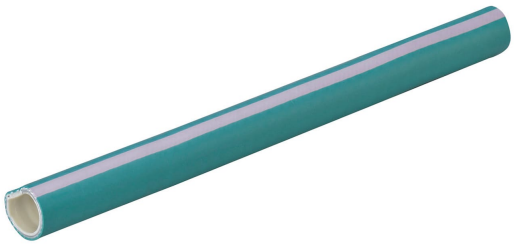

PLUTONE PK – FLEXIBLE HOSE AND DUCTING

White/beige TPV inline, reinforced with steel spiral and polyester yarn. TPV cover with longitudinal white stripe. Liner and cover are smooth, to reduce friction and dirt collection while using it. Robust hose dedicated to the chemical industry, suitable for suction and delivery. It can be conductive (R<102 Ohm/m) by grounding the spiral.

- Temp Range: -30 to +80°C
- Size Range: 20 - 102mm
- Material: TPV thermoplastic rubber
- Reinforced: Textile & steel spiral

Plutone PK Datasheet

WHITEHOUSE
FLEXIBLE TUBING LTD

PRODUCT DETAILS

Plutone PK

White/beige TPV inline, reinforced with steel spiral and polyester yarn. TPV cover with longitudinal white stripe. Liner and cover are smooth, to reduce friction and dirt collection while using it. Robust hose dedicated to the chemical industry, suitable for suction and delivery. It can be conductive (R<102 Ohm/m) by grounding the spiral. Good resistance to ageing, weather conditions

and ozone.

Application Fields: Suction and delivery of acids, alcali and chemicals of various types.

Temp Range: -30 to +80°C

Size Range: 20 – 102mm

Material: TPV thermoplastic rubber

Reinforced: Textile & steel spiral

- Temp Range: -30 to +80°C
- Size Range: 20 – 102mm
- Material: TPV thermoplastic rubber
- Reinforced: Textile & steel spiral

TECHNICAL DATA

CODE	Ø INT.	Ø OUT.	WEIGHT	W.P.	B.P.	VACUUM	BENDING R.	COIL LGTH.	VOLUME
	mm	mm	g/m	bar	bar	m H2O	mm	m	m3
PK010200029000	20	29	**390**	14	42	10	80	60	0,106
PK010250035000	25	35	**540**	13	39	10	100	60	0,146
PK010300040000*	30	40	**630**	13	39	9	120	60	0,184
PK010320043000	32	43	**730**	12	36	9	130	60	0,214
PK010380049000	38	49	**850**	12	36	9	150	30	0,198
PK010400051000*	40	51	**885**	11	33	9	160	30	0,202
PK010450058000*	45	58	**1280**	15	45	8	230	30	0,241
PK010500063000	50	63	**1400**	13	39	8	250	30	0,286
PK010520065000*	52	65	**1450**	13	39	8	260	30	0,291
PK010600074000*	60	74	**1755**	12	36	8	300	30	0,365
PK010630077000*	63	77	**1835**	11	33	8	320	30	0,379
PK010700085000*	70	85	**2110**	10	30	7	350	30	0,469
PK010760091000*	76	91	**2275**	10	30	7	380	30	0,604
PK010800095000*	80	95	**2345**	9	27	7	400	20	0,498
PK010900106000*	90	106	**2865**	9	27	7	450	20	0,760
PK011020118000*	102	118	**3210**	8	24	7	510	20	0,801

DOWNLOADS

Plutone PK Datasheet

FAQS

What is Plutone PK?

White/beige TPV inline, reinforced with steel spiral and polyester yarn. TPV cover with longitudinal white stripe. Liner and cover are smooth, to reduce friction and dirt collection while using it. Robust hose dedicated to the chemical industry, suitable for suction and delivery. It can be conductive (R<102 Ohm/m) by grounding the spiral.

What applications are listed for Plutone PK?

Application Fields: Suction and delivery of acids, alcali and chemicals of various types.

What else does the product description state about Plutone PK?

White/beige TPV inline, reinforced with steel spiral and polyester yarn. TPV cover with longitudinal white stripe. Liner and cover are smooth, to reduce friction and dirt collection while using it. Robust hose dedicated to the chemical industry, suitable for suction and delivery. It can be conductive (R<102 Ohm/m) by grounding the spiral.